


PILING SHELF

Technical data

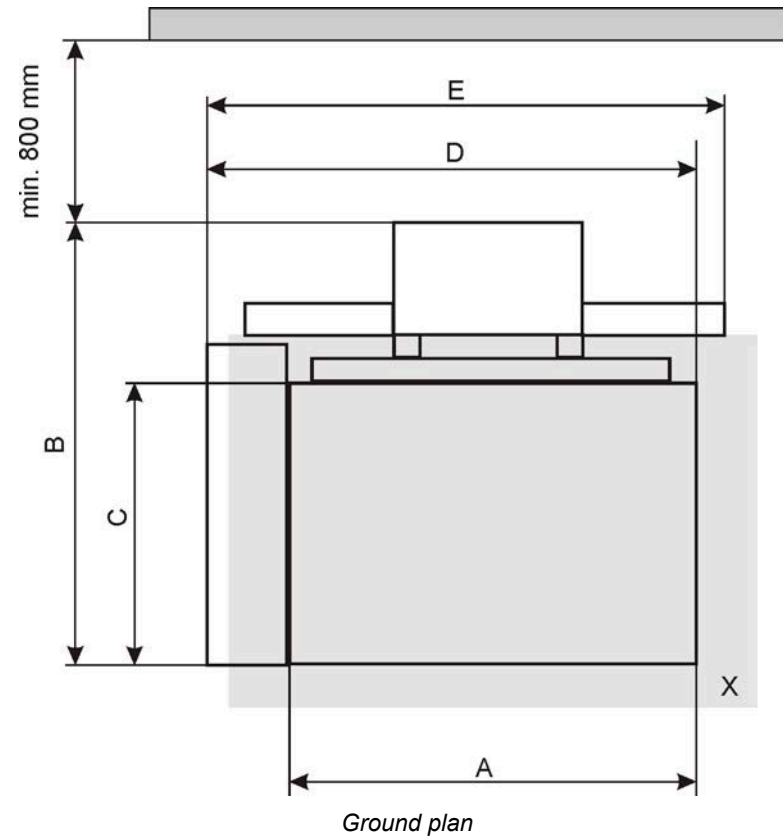

	STR - 1000 - 4	STR - 1000 - 6
A (mm)	1.170	1.480
B (mm)	1.655	1.875
C (mm)	900	1.120
D (mm)	1.620	1.995
E (mm)	1.900	2.120
Weight (kg)	1.800	2.000
Carrying capacity, max. (kg)	1000	1000
Load capacity, max. (kg)	600	600
Format, max. (X x Y, mm)	1.140 X 750	1.420 x 1.000
Feeding height, min. / max. (mm)	30 / 140	30 / 140
Size piling shelf (X x Y, mm)	1.170 x 900	1.480 x 1.120
Height (mm)	1.550	1.550
Height at max stroke (mm)	1.960	1.960
Electrical power input (apparent power) (kVA)	0,8	0,8
Thermal rating (BTU/h)	2.595	2.595

The wire cross section of the main power supply according to the countrys regulations. Same regulations according the plug connectors.

Safety range

The safety range [X] below the piling shelf and an additional area of 30 cm to the sides and to the front has to be marked in black and yellow (not included in the scope of supply).

Hydraulic data

Hydraulic working pressure: 150 bar!

Hydraulic unit is constructed for a maximum permissible pressure of 200 bar.